


SPECIFICATIONS:

RATING: 12mA 24VDc (SPDT), 50mA 12VDC (SPST).
INITIAL CONTACT RESISTANCE: 100mΩ max. (initial).
DIELECTRIC STRENGTH: 250V AC 1 minute (Except between terminals of LED).
INSULATION RESISTANCE: 100M min.(250V DC megger).
ELECTRICAL LIFE: 100,000 operations(Rated voltage and current).
STATIC CAPCITY: 1.5pF max.(1MHz)
OPERATING FORCE: 170gf±50gf (SPDT), 450gf±100gf (SPST).
FUNCTION: Momentary (SPDT), tactile (SPST).
OPERATION TEMPERATURE RANGE: -25°C to + 75°C

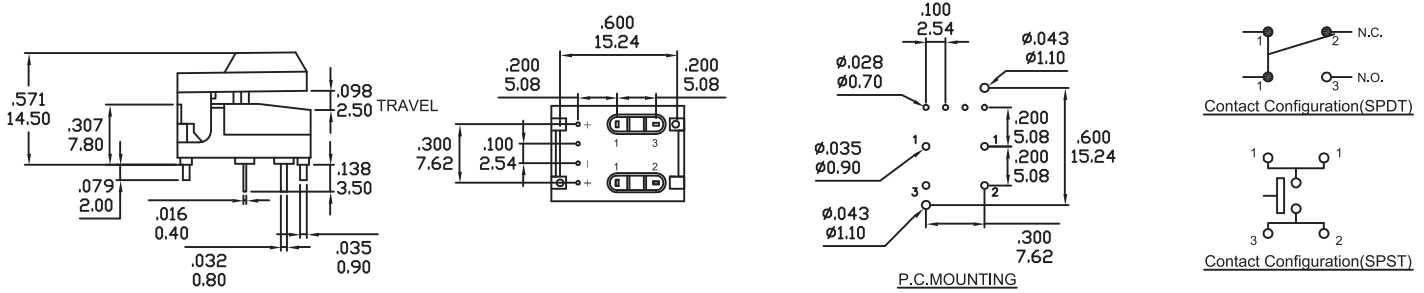

CAP STYLES

<p>A0</p>	<p>A1</p>	<p>A2</p>
<p>B0</p>	<p>B1</p>	<p>B2</p>


CAP COLORS

- | | |
|----------|----------|
| 1=RED | 6=ORANGE |
| 2=YELLOW | 7=BLUE |
| 3=GREEN | 8=BROWN |
| 4=WHITE | 9=GRAY |
| 5=BLACK | |

LED COLORS

LEFT: 1=RED 2=YELLOW 3=GREEN
 RIGHT: 1=RED 2=YELLOW 3=GREEN

HOW TO ORDER

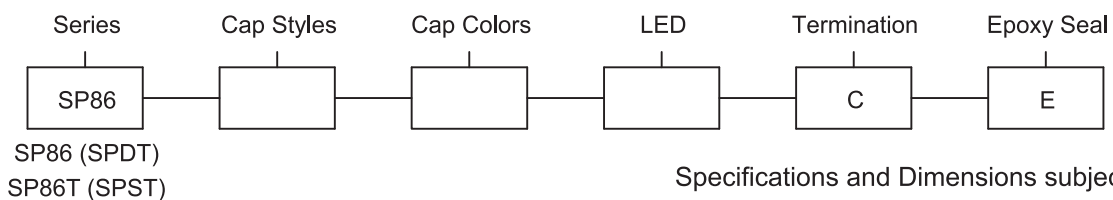

Specifications and Dimensions subject to change