

**SPECIFICATIONS:**


CONTACT RATING: 03A @ 115 VDC max. shorting type.  
 CONTACT RESISTANCE: 40mΩ max. initial.  
 CONTACT TIMING: Shorting.  
 INSULATION RESISTANCE: 1,000MΩ @500 VDC min.  
 DIELECTRIC STRENGTH: 1,000V RMS @ sea level.  
 ACTUATION FORCE: 950gf max.  
 LIFE EXPECTANCY: 10,000 cycles min.  
 OPERATING TEMPERATURE: -20° C to +100° C.  
 STORAGE TEMPERATURE: -40° C to +20° C.

**MATERIALS:**

MOVABLE CONTACT: Copper alloy with silver plating.  
 BASE: UL 94V-0 grade PPS thermoplastic/black color.  
 COVER: UL 94V-0 grade PPS thermoplastic/black color.  
 ACTRATOR: UL 94V-0 grade nylon thermoplastic/white color.


If your preferred product configuration is not shown, please contact our sales representative for custom design.

**HOW TO ORDER SYSTEM**





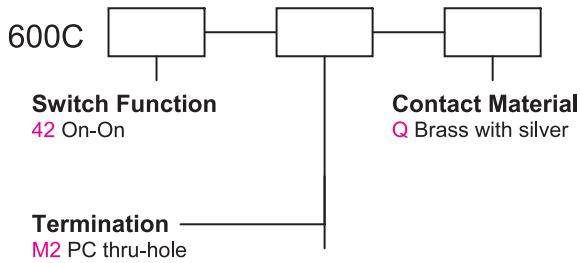


M2

P.C.MOUNTING



Model No.	Switching Position	
42	ON	ON
Term. Comm.	1-2,4-5	2-3,5-6



4PDT

## CONTACT MATERIAL OPTIONS

Coding	Contact & Terminal Material	Rating	Agency Approvals
Q	Brass with silver plating	0.3A @ 115VDC	