


## Technical Information:

### L Type Tolerance List

Item		Unit	0.05P	0.10P	0.18P	0.25P
Pitch	P	mm	$0.05 \pm 0.03$	$0.1 \pm 0.04$	$0.18 \pm 0.05$	$0.25 \pm 0.05$
Length	L	mm	$1.0 \sim 5.0 \pm 0.1$	$5.1 \sim 30.0 \pm 0.2$	$30.1 \sim 70.0 \pm 0.3$	
		mm	$70.1 \sim 120.0 \pm 0.4$	$120.1 \sim 200.0 \pm 0.6$	$200.1 \sim 300.0 \pm 0.8$	
Height	H	mm	$0.8 \sim 5.0 \pm 0.1$		$5.1 \sim 25.0 + 0.15 / - 0.1$	
Width	W	mm	$0.4 \sim 6.1 \pm 0.1$			

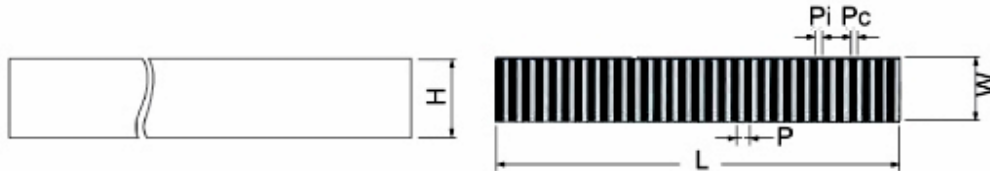

### L Type Physical Properties

	Properties	0.05P	0.10P	0.18P	0.25P	Unit	Test Method
Physical	Compression Set	15~20	15~20	15~20	15~20	%	--
	Operating Temperature	-25~+85	-25~+85	-25~+85	-25~+85	°C	--
Mechanical	Specific Gravity	1.15	1.25	1.25	1.25	g/cm <sup>3</sup>	ASTM D792
	Tensile Strength	50~60	50~60	50~60	50~60	kg/ cm <sup>2</sup>	ASTM D412
	Elongation	250~330	150~200	150~200	150~200	%	ASTM D412
	Hardness	60~65	63~67	63~67	65~67	Shore A	ASTM D2240
Electrical	Voltage Breakdown	2300~2700	2300~2700	2300~2700	2300~2700	V/mm	ASTM D149
	Volume Resistance	0.7~1.0	4~6	4~6	4~6	Ω • cm	ASTM D257
	Insulation Resistance (500VDC)	$1 \times 10^3$	$1 \times 10^3$	$1 \times 10^3$	$1 \times 10^3$	Ω	ASTM D149
Regulatory	RoHS Compliant	Yes	Yes	Yes	Yes	--	Lab. Certification

\* The above testing results comes from laboratory report, information are for your reference only.